

BW10-1654-T-PSxx



BANDWIDTH10, LTD.

Description:

Bandwidth10's BW10-1654-T-PS is part of a family of lasers based on the innovative High Contrast Grating (HCG) single mode 1654 nm VCSEL.


Applications:

- Optical gas sensing (CH₄)
- Range Finding
- OTDR
- Optical communications (U-band)

Features:

- TO-56 7Pin Small Form Footprint
- LC Fiber Connector (1.25mm Fiber)
- Integrated TEC (Temperature Stabilization)
- CW Optical Output Power
- Single Mode VCSEL (~1654 nm)
- Fast Wavelength Tuning
- Internal optical isolator with isolation ratio >20 dB

Dimensional Drawing and Pin Assignment

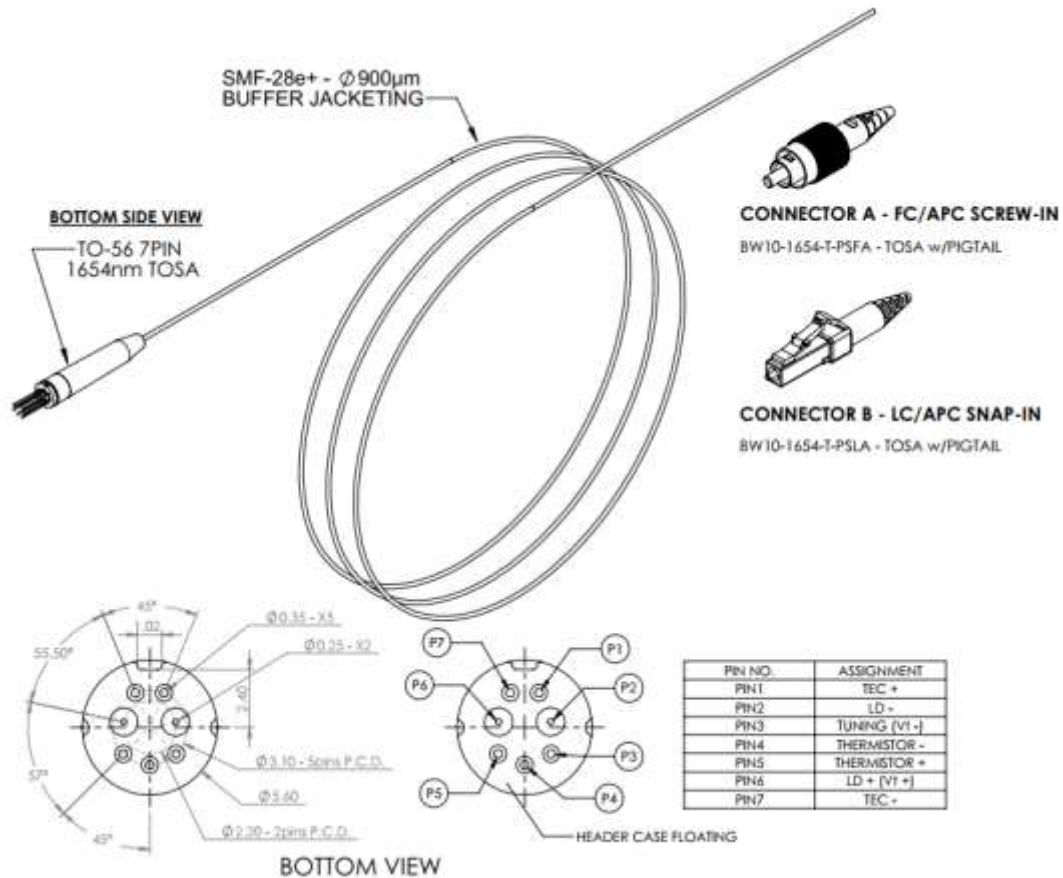

CAUTION: Device is sensitive to electrostatic discharge.

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Storage Temperature	Tstg	-20 to +85	°C
Operating Case Temperature	Tc	-5 to +70	°C
Forward Current of VCSEL	I _{LD}	25	mA
Reverse Voltage of VCSEL	V _{LD}	3	V
Soldering Temperature	Tsld	350 (10 sec.)	°C

General Specification and Operating Table

Parameter	Symbol	Values			Unit
		Min	Typical	Max	
Optical Output Peak Power @25° C TEC temperature over tuning range	P	-6		t.b.d	dBm
Operating Bias Current	I _{op}	0	25	t.b.d	mA
Operating TEC Temperature range	T _{op}	5	20	35	°C
Threshold Current	I _{th}		7	t.b.d	mA
Laser Drive Voltage	V _{cc}	0	1.5	2.5	V
Resistance	R _s		50		Ω
Center Wavelength	λ		1654		nm
Guaranteed Tuning Range	Δλ	4	t.b.d		nm
Max. Mechanical Tuning Response	f _{max}	100			kHz
Side-mode suppression ratio	SMSR	30	40		dB
Linewidth (-3 dB FWHM), CW I _{bias} =I _{op}	σ			t.b.d	MHz
Relative Intensity Noise	RIN			-128	dB/Hz
Tuning Voltage	V _{tune}	0	Test Sheet	Test Sheet	V
Tuning Current	I _{tune}	0	-	100	μA
TEC Voltage	VTEC		0.35	1.5	V
TEC Current	ITEC		0.05	0.6	A

Electrostatic Discharge (ESD)

LD+/LD- ESD classification: Class 1A, Human Body Model (HBM).

Vt- ESD classification: Class 0, Human Body Model (HBM).

Since this is an ESD sensitive device, proper ESD precautions (limit exposure to below 100V HBM) should be taken during every step of the assembly process.

Standard ESD testing was to MIL-STD-883, Human Body Model, with 3 pulses forward/reverse applied to the signal leads. Failure is defined as a measurable (>10%) change in a key parameter, optical output power for the tunable VCSEL. The LD+/LD- and Vt- of VCSEL TOSA fails at 350 Volts and <50 Volts respectively for damage to the laser chip, with a decrease in optical power output.

Order and Contact Information

Model Number	Contact Information	Unit
BW10-1654-T-PSFA Pigtailed TOSA with standard single mode fiber and FC/APC connector BW10-1654-T-PSLA Pigtailed TOSA with standard single mode fiber with LC/APC connector Please specify center wavelength in the purchase order	Bandwidth10 Ltd. 2150 Kittredge Street, Suite 250 Berkeley, CA 94704 USA	Tel: 203-561-0769 Email: info@bandwidth10.com